



TECHNICAL DATA SHEET




PROPERTIES	SPECIFICATIONS		NORMATIVE REFERENCES
	129	129 XL	

Product properties	Material		Honeycomb structure in 100% recycled injected polypropylene			
	Tare weight		1,25 kg/m ²		ISO 845	
	Panel length		1200 mm	1600 mm unfolded	ISO 1923	
	Panel width		800 mm	1200 mm		
	Thickness	Panel	29 mm			
		Walls	± 1 mm			
	Cell size		± 45 mm			
	Colour		White, beige, pink, grey, black			
	Thermally bonded non-woven	Side 1		PET 45 g/m ²		NFEN 29 073-1
		Side 2		None		
		To overlap	width	> 60 mm		
	Length		> 60 mm			
	Chemical resistance		High resistance to water and most acids, bases and salt solutions			
Temperature behaviour		U.V - and frost-Resistant				
Slope stability for roadway		Up to 15 % slope				

*nida gravel pink, grey and beige is available on demand with a minimum quantity (consult us)

Mechanical properties	Compressive strength (filled with gravel)		> 300 t/m ²		ISO 844
-----------------------	---	--	------------------------	--	---------

NOTA : The indicated directions can serve as a guide to use the product but cannot be considered as a guarantee of a good working up. Additionally application, utilization and/or transformation of the products escape our control possibilities. As a consequence, they exclusively remain the responsibility of the user and/or the transformer.

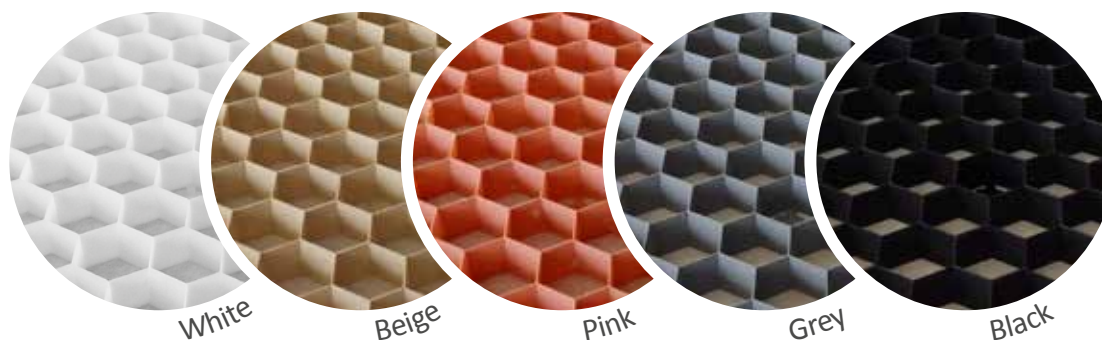

White


Beige

Pink


Grey

Black


Dimensional drawings

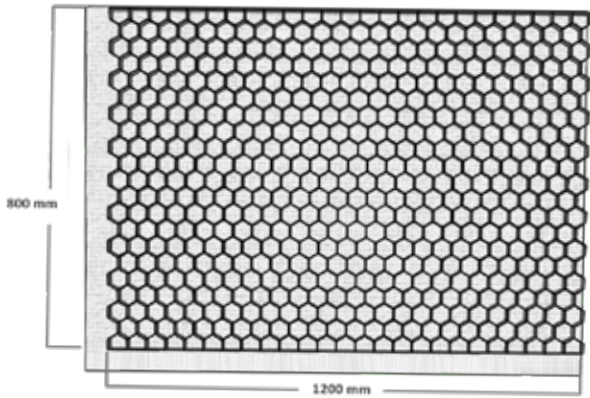


Front view

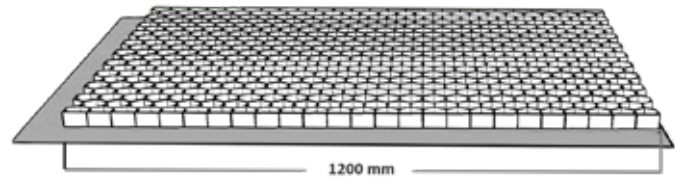

Side view

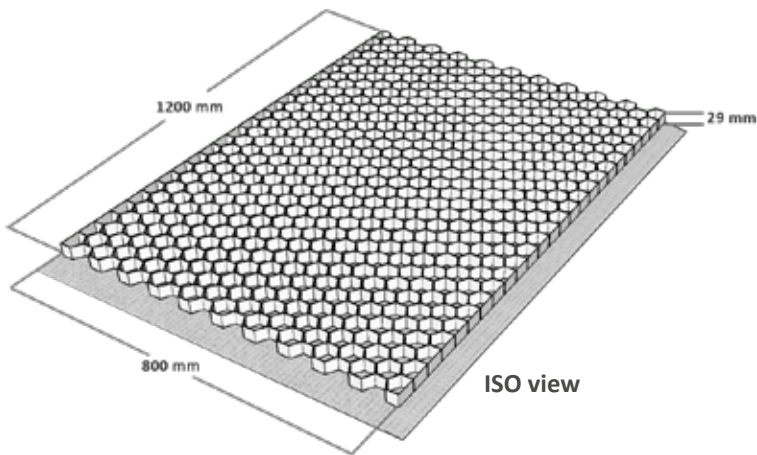


ISO view

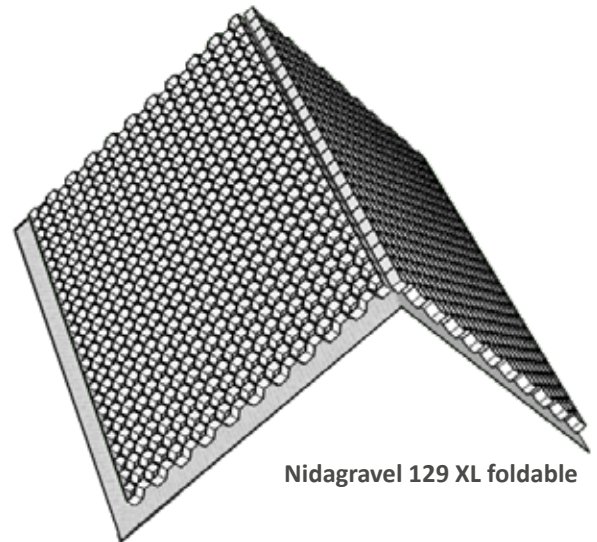

Nidagravel 129 XL foldable

Packaging

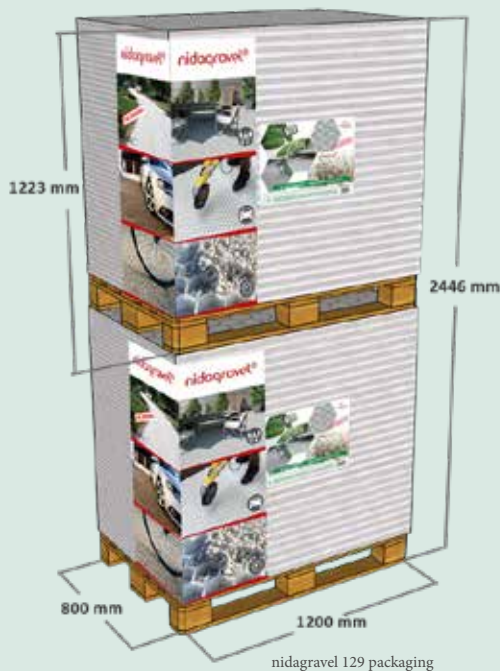

nidagravel 129 packaging

Products	129	129 XL
Dual Pallet	L	1200 mm
	l	800 mm
	h	2446 mm
Packaging description	Protective cover Plastic strapping Sticker On lost-wooden pallet	

Dual Pallet	129	129 XL
Pieces / pallet	2 x 37	2 x 19
m ² / pallet	2 x 35,52	2 x 36,48
Pallet weight (Kg)	2 x 53	2 x 52

